


Vibration Dampers Cylindrical Type TP-C

Fig. 9353 | VIBRATION DAMPER RUBBER METAL TYPE TP-C - WAISTED - NR - 55 SHORE
D 10/8MM TO 95/80MM - H 8MM TO 75MM - M3 TO M16

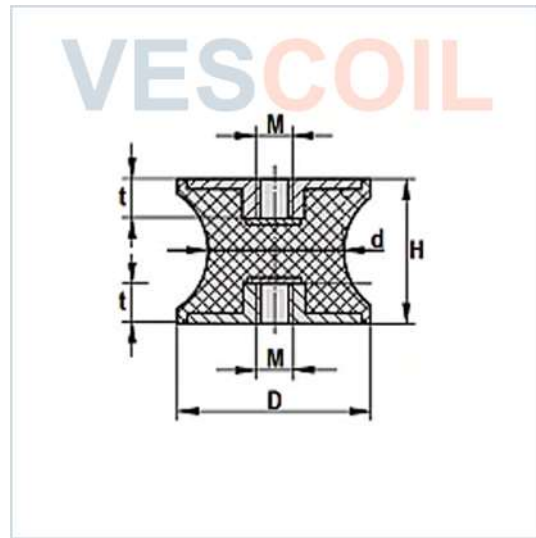

DOCUMENTATION

Fig:	9353
Norm:	ISO
Standard:	ISO 3302-1 (Rubber)
Type:	Type TP-C - Waisted
Diameter (D):	10/8 mm to 95/80 mm
Height (H):	8 mm to 75 mm
Thread (M):	M3 to M16
Thread length (l):	
Hardness rubber (Shore):	55 ±5% other on request
Material rubber:	NR (Para) Natural Rubber
Material steel:	St-37 Galvanized Steel or Stainless Steel AISI 304 (A2)
Temperature:	-30°C to +80°C
Markets:	Maritime / Offshore / Industry / Energy / Petrochemical
Function:	Subject to radial movement / Impact cushion

Available on request:

Different Shore
 Rubber in SBR, NBR, CR, SI or EPDM
 Different thread lengths
 Metal parts in stainless steel

The target values mentioned in the table above are based on a static load. At (high) dynamic and variable load or high vibration frequencies, a reduction of the maximum values must be taken into account.

D=large Ø, d=waist Ø, H=height, M=thread size, Mat. A=type of rubber, Mat. B=Material metal components, Shore A °=Shore-A hardness of the rubber, t=length of threaded bush

MAIN DIMENSIONS

ARTICLE	TYPE	D	H	d	l	M	SHORE A °	Material A	Material B
93530001	TP-C	10	10	8		M 4	55 ±5	NR	St37
93530002	TP-C	10	8	4,5		M 3	55 ±5	NR	St37
93530003	TP-C	15	15	12		M 4	55 ±5	NR	St37
93530004	TP-C	15	15	8,5		M 4	55 ±5	NR	St37
93530005	TP-C	20	30	12		M 6	55 ±5	NR	St37
93530006	TP-C	20	15	14		M 4	55 ±5	NR	St37
93530007	TP-C	20	19	14		M 6	55 ±5	NR	St37
93530008	TP-C	20	30	14		M 4	55 ±5	NR	St37
93530009	TP-C	25	20	18		M 6	55 ±5	NR	St37
93530010	TP-C	25	20	18		M 8	55 ±5	NR	St37
93530011	TP-C	25	20	20		M 6	55 ±5	NR	St37
93530012	TP-C	30	25	18		M 6	55 ±5	NR	St37
93530013	TP-C	30	20	22		M 8	55 ±5	NR	St37
93530014	TP-C	40	48	20		M 8	55 ±5	NR	St37
93530015	TP-C	40	30	25		M 8	55 ±5	NR	St37
93530016	TP-C	40	30	33		M 8	55 ±5	NR	St37
93530017	TP-C	50	30	42		M10	55 ±5	NR	St37
93530018	TP-C	55	45	44		M 8	55 ±5	NR	St37
93530019	TP-C	57	44	25		M10	55 ±5	NR	St37
93530020	TP-C	57	45	25		M 8	55 ±5	NR	St37
93530021	TP-C	57	44	45		M10	55 ±5	NR	St37
93530022	TP-C	60	60	49		M10	55 ±5	NR	St37
93530023	TP-C	70	53	45		M12	55 ±5	NR	St37
93530024	TP-C	95	75	80		M16	55 ±5	NR	St37