


Machine Mount Without Spindle

Fig. 9364 | MACHINE MOUNT WITHOUT SPINDLE - NR - 40 TO 70 SHORE - D 80MM TO 200MM - H 10MM TO 15MM - M10 TO M20

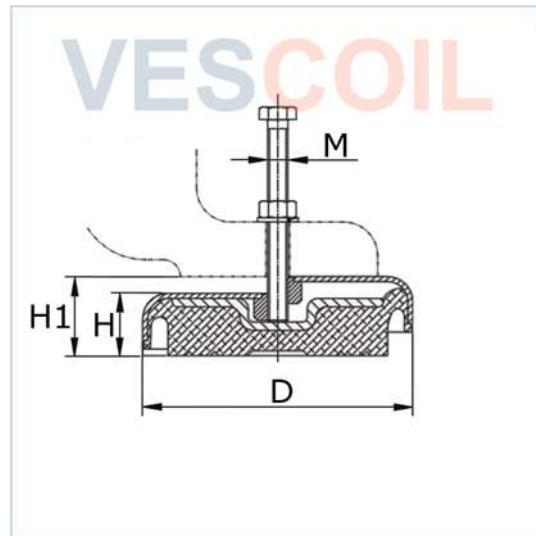

DOCUMENTATION

Fig:	9364
Norm:	ISO
Standard:	ISO 3302-1 (Rubber)
Type:	Machine Mount Without Spindle
Diameter Base (D):	80 to 200 mm
Height (H):	10 mm to 15 mm
Thread (M):	M10 to M20
Max Load Newton:	3000 to 30000
Hardness rubber (Shore):	40 ±5% other on request
Material rubber:	NR (Para) Natural Rubber
Material steel:	Galvanized Steel
Temperature:	-40°C to +80°C
Markets:	Maritime / Offshore / Industry
Used in:	Machines for steel / cutting / grinding / lathes

Available on request:

Diff. Shore hardness A 40° to A 70°

Metal parts stainless steel A2 or A4

The target values mentioned in the table above are based on a static load. At (high) dynamic and variable load or high vibration frequencies, a reduction of the maximum values must be taken into account.

D=Ø-Base, H=Height minimal, H1=Height maximal, M=Threaded bush size (Metric), Mat. A=type of rubber, Mat. B=Material metal components, N=Maximal load per element in Newton, Shore A °=Shore-A hardness of the rubber

MAIN DIMENSIONS

Article	D	H	H1	N	M		Shore A °	Materiaal A
93640001	80	25	35	3000	M10		55 ±5	NR
93640002	80	25	35	3000	M12		55 ±5	NR
93640003	90	35	45	4000	M12		55 ±5	NR
93640004	90	35	45	4000	M16		55 ±5	NR
93640005	108	25	30	5000	M16		55 ±5	NR
93640006	120	35	47	6000	M12		55 ±5	NR
93640007	120	35	47	6000	M16		55 ±5	NR
93640008	150	40	52	10000	M12		55 ±5	NR
93640009	150	40	52	10000	M16		55 ±5	NR
93640010	200	45	60	30000	M20		55 ±5	NR